




Model D722

Specifications

No. of Cylinders			3	Industrial Use	Gross Intermittent	3600	kW/HP/PS	14.9/20.0/20.3
Bore x Stroke		mm (in)	67 x 68 (2.64 x 2.68)			3000		12.4/16.6/16.9
Displacement		L (cu.in.)	0.719 (43.88)			2800		11.5/15.4/15.7
Combustion System			E-TVCS			2600		10.7/14.3/14.6
Intake System			Natural aspirated			2400		9.9/13.3/13.5
Cooling System			Radiator cooling			2200		9.0/12.1/12.3
Starter Capacity		V-A	12-0.7		Net Intermittent	3600	kW/HP/PS	14.0/18.8/19.1
Dry Weight		kg (lbs)	63.1 (139.1)			3000		11.9/15.9/16.1
Dimensions	Length	mm (in)	435.1 (17.13)			2800		11.0/14.7/15.0
	Width		404.0 (15.91)			2600		10.3/13.8/14.0
	Height		564.1 (22.21)	2400		9.5/12.7/13.0		
				2200		8.7/11.7/11.9		
				Net Continuous	3600	kW/HP/PS	12.2/16.3/16.6	
					3000		10.3/13.8/14.0	
					2800		9.6/12.9/13.0	
					2600		8.9/11.9/12.2	
					2400		8.3/11.1/11.3	
					2200		7.6/10.2/10.3	
				Generator Use	Stand-by	kW/HP/PS	3600	13.4/18.0/18.2
							3000	11.3/15.1/15.4
					Continuous		3600	12.1/16.2/16.5
							3000	10.3/13.8/14.0

*Specifications are subject to change without notice. *Dry weight is according to Kubota's standard specification. When specification varies, the weight will vary accordingly.

Performance Curve

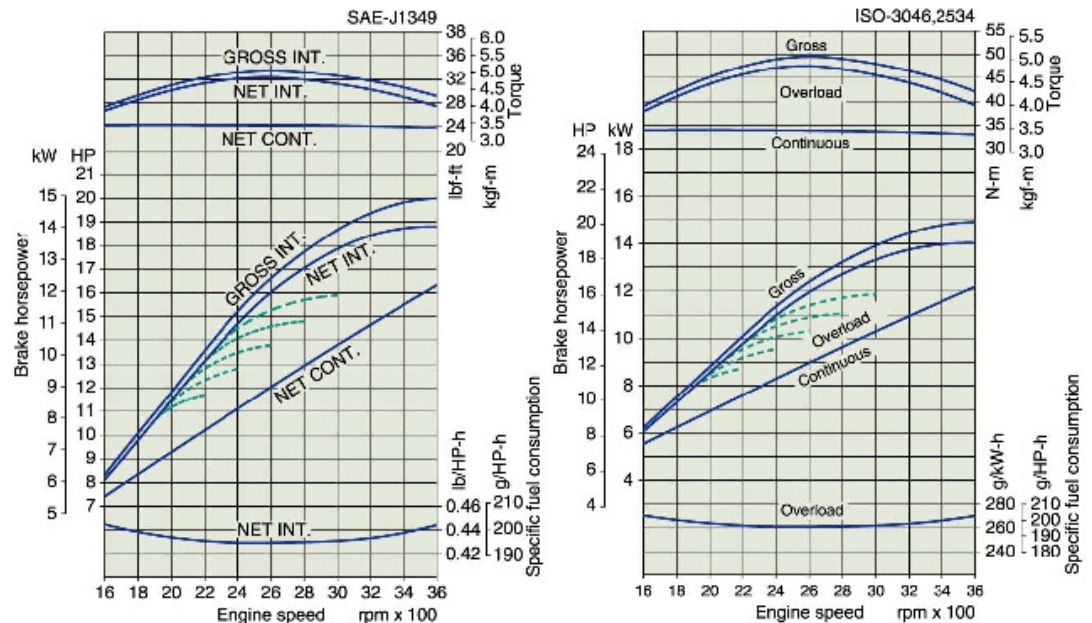

Dimensions mm (inch)

